

Ooma Office

Yealink DECT IP Desk Phone

Quick Installation Guide



Introduction

Setting up your Yealink DECT IP Desk Phone with Ooma Office is quick and easy. Follow the instructions below to install your phone. You should be up and calling in a few minutes.


NOTE If you do not have an Ooma Office account, please visit <http://office.ooma.com/signup>

The Yealink DECT IP Desk Phone pairs with a Yealink DECT base station, not included.

If you do not have a Yealink DECT base station, please visit <http://office.ooma.com/store/accessories> to purchase.

Package Contents


Confirm your package contents, then follow the instructions to install your phone.



Yealink DECT IP phone



Handset cord



Power adapter



DD10K DECT dongle

Step 1 Register Phone Online

If your phone is labeled **Ready to Call**, proceed to Step 2. You can also skip Step 3.




If not, you will need to add your DECT Phone to your Ooma Office account. Visit http://ooma.office.com/add_ip_phone and select the appropriate model from the “**Wireless Phones**” section then follow the on screen instructions, including adding a Yealink Base Unit if necessary.



Step 2 Assemble Your Phone and Attach DECT Dongle

Attach the phone stand and the handset to the phone base. Then attach the DECT dongle to the USB port on the back of the phone.


Connect the phone to AC power and place in the general proximity of Yealink DECT base station (which also needs to connect to AC power).

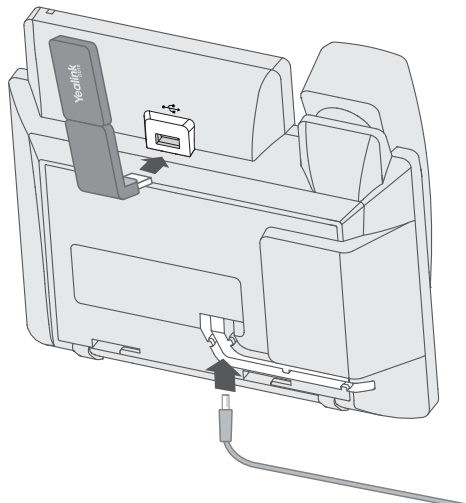

NOTE For additional assembly instructions, please review the phone manufacturer’s user manual included in your box.

Step 3 Pair Phone to Base Unit

Once the dongle is attached and the phone is powered, you will see a message on screen that reads “**Dongle is inserted, reboot and switch to DD phone mode?**” Press the **OK** soft key. The phone will display “**Searching for base**” and then come online.

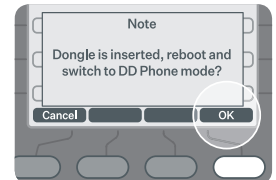

You will then need to pair your phone with the Yealink Base Unit. Press and hold the pairing button on the base until the top green LED on the base unit lights up.

Once the correct date/time displays on the phone, you can lift the handset from the cradle or push the **Speaker** button. If you hear dialtone, your phone is now ready to make and receive calls.



Need help? If the phone still has no service, please contact Ooma Office Support at **866-939-6662** (US) or **877-948-6662** (Canada).